



WR 040MEWP

NEW




Retractable type fall arrester for vertical and horizontal on basket lifts on **mobile elevating work platforms (MEWP)** - aerial work platforms, where there is a risk of falling from height.

EN 360:2002

PPE - R / 11.085
PPE - R / 11.060
PPE - R / 11.062

TESTED



ON BASKET LIFTS

Force acting on the attachment point MEWP device is less than **3 kN**



FOR FALL FACTOR 2




HORIZONTALLY WHEN FALLING OVER THE EDGE



FOR MAXIMUM USER WEIGHT 120 kg



The WR040MEWP device must be attached to a certified anchor point.

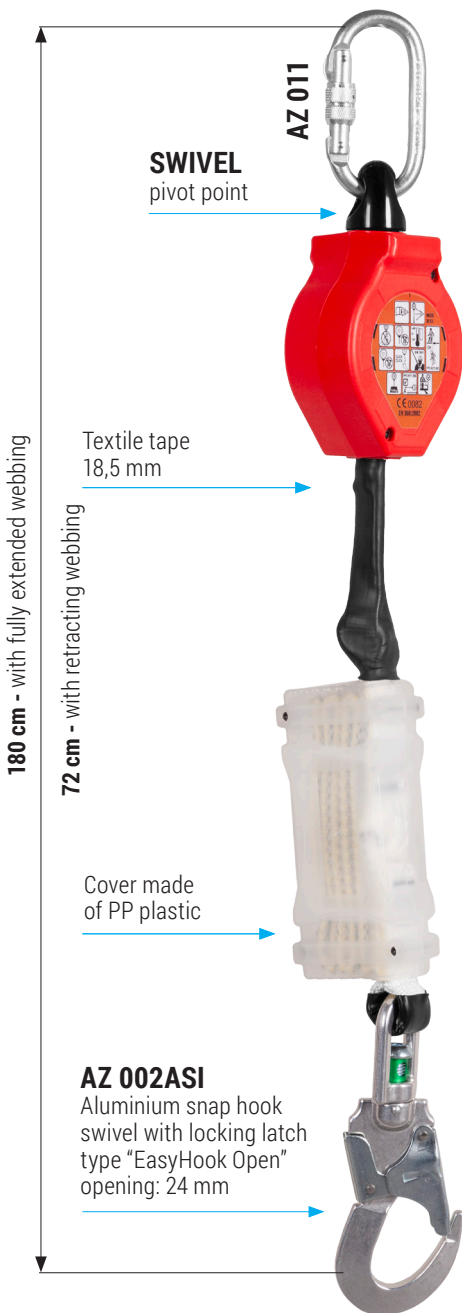

180 cm - with fully extended webbing

72 cm - with retracting webbing

TEXTILE ENERGY ABSORBER



VERTICAL AND HORIZONTALLY USE OF THE DEVICE



SECURITY FOR 1 PERSON

PARAMETERS



Min. static strength device	15 kN
Max. braking force	6 kN
Max. user weight	120 kg
Tape width	18,5 mm
Tape material	textile webbing
Mechanism material	stainless steel
Body material	plastic
Weight of device (without AZ 011)	1260 g

WWW.PROTEKT.UK



WR 040MEWP Retractable type fall arrester

Examples of using the **WR 040MEWP** device on basket lifts.

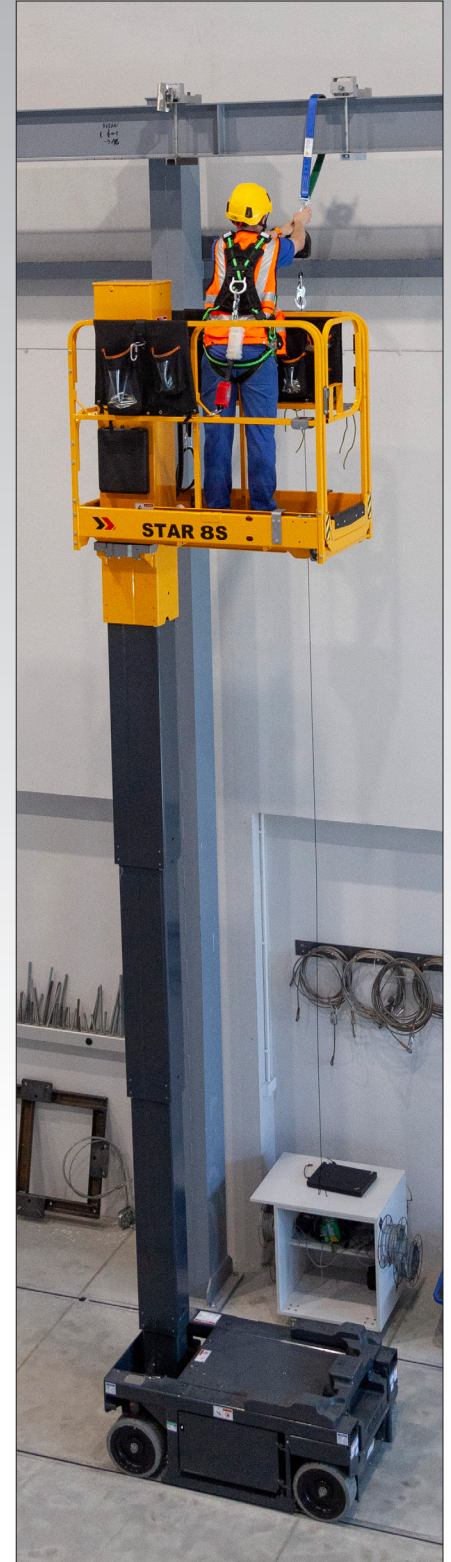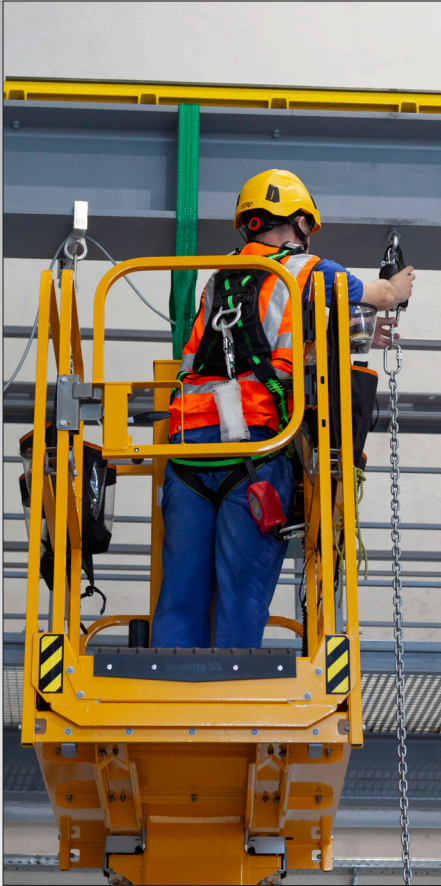

WWW.PROTEKT.UK

PROTEKT[®]

OFFICE - Skromna 6, 93-405 Lodz, POLAND / REGISTERED ADDRESS - PROTEKT Grzegorz Łaszkiwicz Sp. z o.o.
Starorudzka 9, 93-403 Lodz, POLAND / SALES DEPARTMENT Phone +48 42 29-29-500, export@protekt.com.pl, fax +48 42 680-20-93
WAREHOUSE - Gombrowicza 6, 93-405 Lodz, POLAND